



K-PANEL 2.5mm PVC SHEET. (2mm SHEET IS AVAILABLE FOR SUPPLY ONLY) .

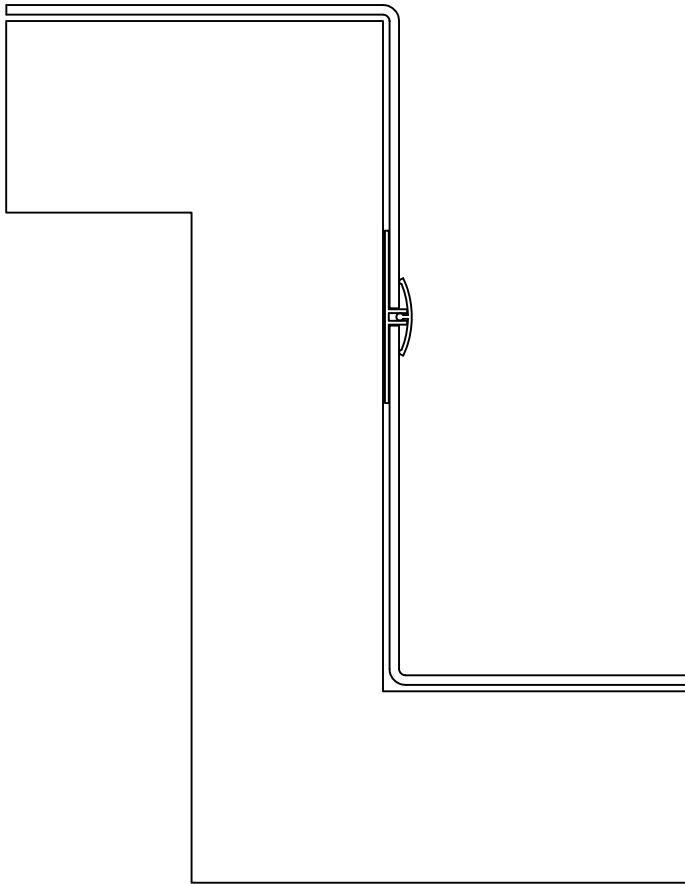

INTERNAL AND EXTERNAL
PRE-FORMED ANGLES 1:2

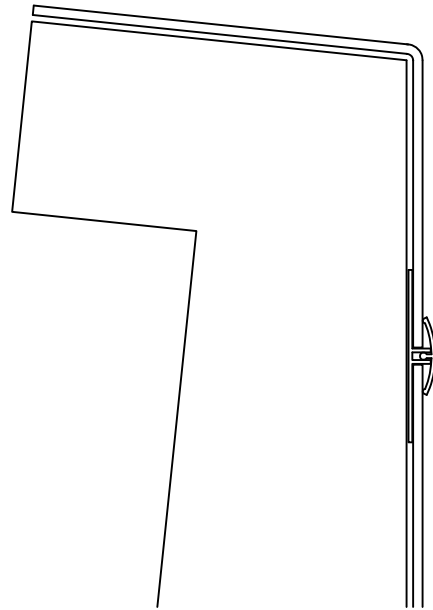

THERMOFORMED CORNERS
FOR NONE-RIGHT ANGLED
CORNERS 1:2

NOTES

THE K-PANEL SHEET IS BONDED WITH HYGIENIK'S POLYMER BONDING, NEEDING ONE APPLICATION ONLY. AN ALTERNATIVE TO POLYMER BONDING IS TO WELD THE JOINTS AND USE 2 PART BONDING AS AN ALTERNATIVE. SEE NBS SPECIFICATION FOR ALTERNATIVES.
THE K-PANEL SHEET HAS A CLASS 1 SURFACE SPREAD OF FLAME, HOWEVER WHEN FIXED TO A NONE COMBUSTIBLE SURFACE THIS CAN ACHIEVE A CLASS 0 SURFACE SPREAD OF FLAME.
THE K-PANEL IS OFTEN USED AS A SPLASH BACK FOR SINKS. MACHINE EDGE THE 2.5mm SHEET AND STICK TO WALL FOR AN EASY TO KEEP CLEAN SOLUTION.

CLEANING STRATEGY FOR O&M MANUALS SEE CSO&M DATA SHEET.

NBS Ref: K13/160